

The logo for KEYA, featuring the word "KEYA" in a stylized, white, sans-serif font. The letters are interconnected, with the 'K' and 'E' sharing a vertical stroke, and the 'Y' and 'A' sharing a vertical stroke. A registered trademark symbol (®) is located at the top right of the 'A'.

UNLOCK INNOVATION

The background features a blue gradient with decorative white lines. On the right side, several thin white lines curve upwards and outwards. At the bottom, a series of thin white lines form a wave-like pattern that curves from the left towards the right.

ELOCK PLUS





## Multuser mode

**1**

**To close:**

\* \* \* \* ✓

+

TURN THE KNOB MANUALLY

**To open:**

\* \* \* \* ✓

LOCK OPENS AUTOMATICALLY

Open and close by 4-digit code. The code is deleted every time the lock is opened, being available for new user.

## Single User mode

**2**

**To open:**

\* \* \* \* ✓

LOCK OPENS AUTOMATICALLY

**To close:**

✓

+

TURN THE KNOB MANUALLY

Open and close by 4-digit code. The code is set for 1 user only.

### Change the User code

**3**

press during 3 seconds

CURRENT Code

NEW Code

Press Enter key during 3 seconds.  
 Introduce Current code and press Enter.  
 Introduce New code and press Enter.

### Open using Master code: Inspection mode / Delete User code

**4**

To open:

MASTER code

-30s INSPECTION MODE	+30s USER ERASED
----------------------------	------------------------

**INSPECTION MODE**  
 Introduce Master code and press Enter.  
 Close the lock by pressing Enter before 30s.  
 The User code is not deleted.

**DELETE USER CODE**  
 Introduce Master code and press Enter.  
 After 30s. the lock remains opened.  
 The user code has been deleted and a new User code will be required to close the lock again.

### Change the Master code

**5**


press during 3 seconds

CURRENT master code

NEW master code

Press Enter during 3 seconds.  
Introduce Current code and press Enter.  
Introduce New code and press Enter.

### Measurements

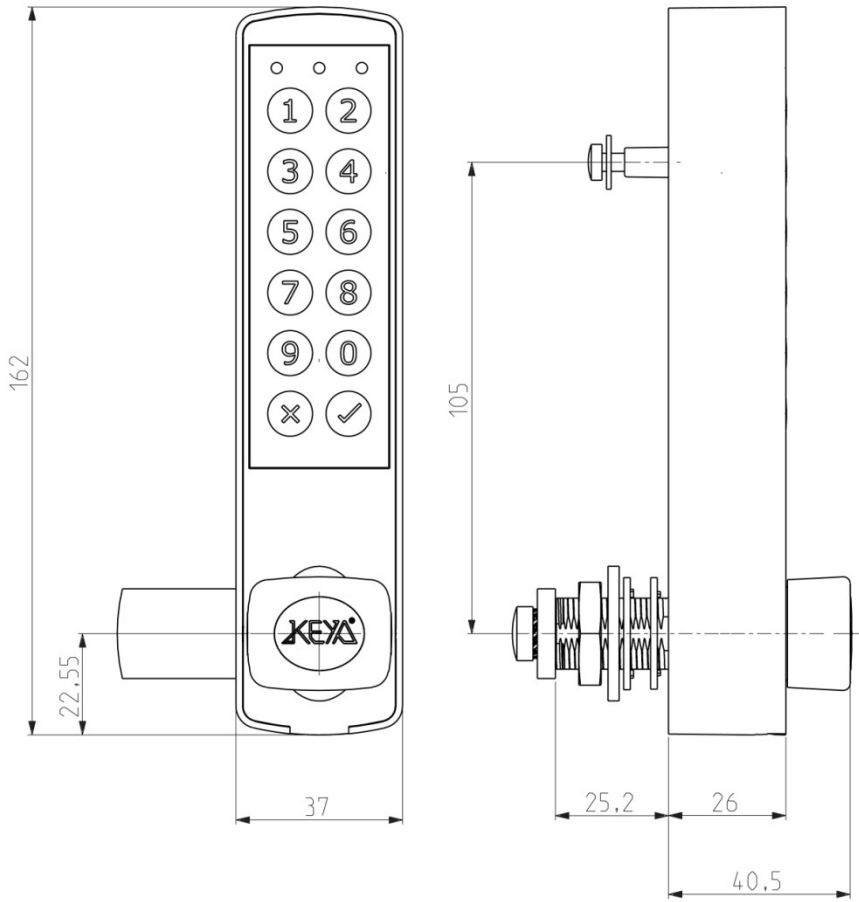

### Technical specifications

Salt spray test	> 96h
Working temperature	-5 ° C <> +70 ° C
IP	IP 65 ( optional )
Latch force	> 45Kgf
UV Rays	> 10000h
Vibration	10 - 200 Hz 2g
Life test	> 200000 cycles
Electrostatic discharge	8000 V
Battery life	> 35000 cycles



RoHS



Management System  
ISO 9001:2008

www.tuv.com  
ID: 910566651

